







# CPREG™-1 ELECTROMAGNETIC HANDLES

2500 mm

NF S 24 PV N° 13/8408/RG1 - LCPP

- Patented
- Adjustable armature plate in case of door sagging
- Come mounted and pre-wired
- Easy, quick and secure fitting (without visible screws)
- Aluminium end caps
- Customizable in all RAL colors

## CHARACTERISTICS

Dimensions H x W x D	CPREG-1/2500	2500 x 90 x 65,5 mm	
	12-24V DC		960-480 mA
	-10 +60 °C		42
	24V DC-1 A		2 x 300*




\* Maximal theoretical holding forces, for an implementation meeting the optimum laying conditions



CPREG-1/2500AS

<b>CPREG-1/2500AS</b>	Electromagnetic handle CPREG-1 2500 mm 2 x 300 DaN 12-24V DC + contact natural anodizing	13 kg
<b>CPREG-1/2500B</b>	Electromagnetic handle CPREG-1 2500 mm 2 x 300 DaN 12/24V DC + contact mill finish	13 kg

Customs code  
83014019

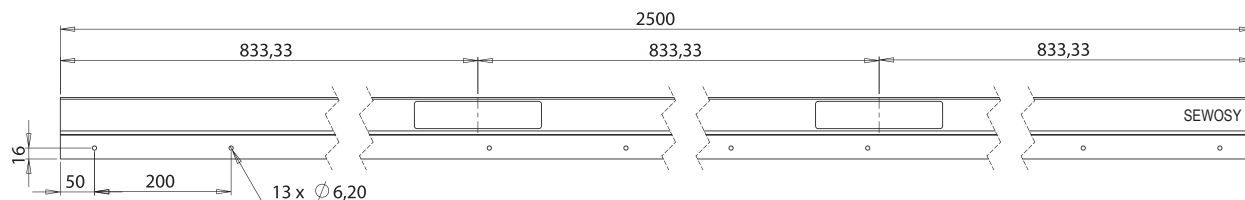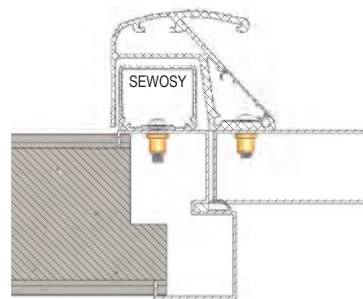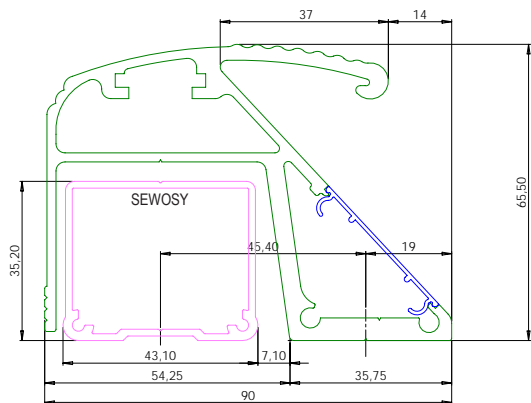

CPREG™-1 ELECTROMAGNETIC HANDLES - 2500 MM