

# VELMAG™ MORTISE ELECTROMAGNETIC LOCKS

## 300 DaN

- Suitable for most profiles
- Connection by removable screw terminal block
- Locked / unlocked status sensor by REED contact (CTC model)
- Anti-remanence device by ejector

Removable lateral mounting wings




EF300ENC CA

### CHARACTERISTICS

Dimensions H x W x D	Electromagnet Armature plate	37,70 x 227 x 27 mm 38 x 180 x 11 mm - M8		
	12-24V DC		480-240 mA	
	-10°C +55°C		42	
	24V DC-1 A		300*	

\* Maximal theoretical holding forces, for an implementation meeting the optimum laying conditions

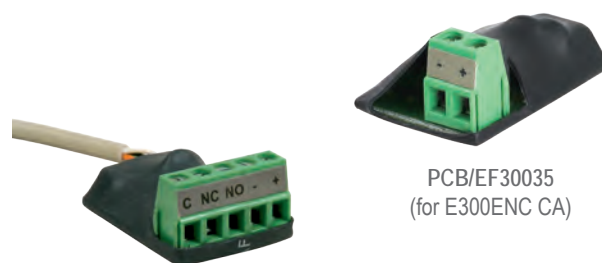PCB/EF30035CTC  
(for E300ENCCTC CA)PCB/EF30035  
(for E300ENC CA)

EF300ENC CA

Mortise electromagnetic lock 300 DaN 12-24V DC


2 kg

EF300ENCCTC CA


Mortise electromagnetic lock 300 DaN 12-24V DC + contact

2 kg

Customs code  
83014019

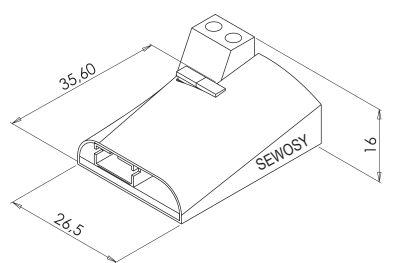

PCB for EF300ENC CA

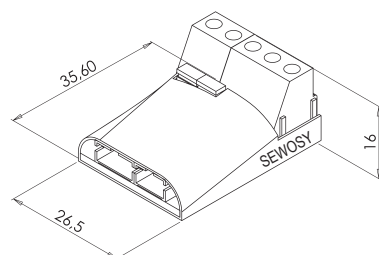

PCB for EF300ENCCTC CA

